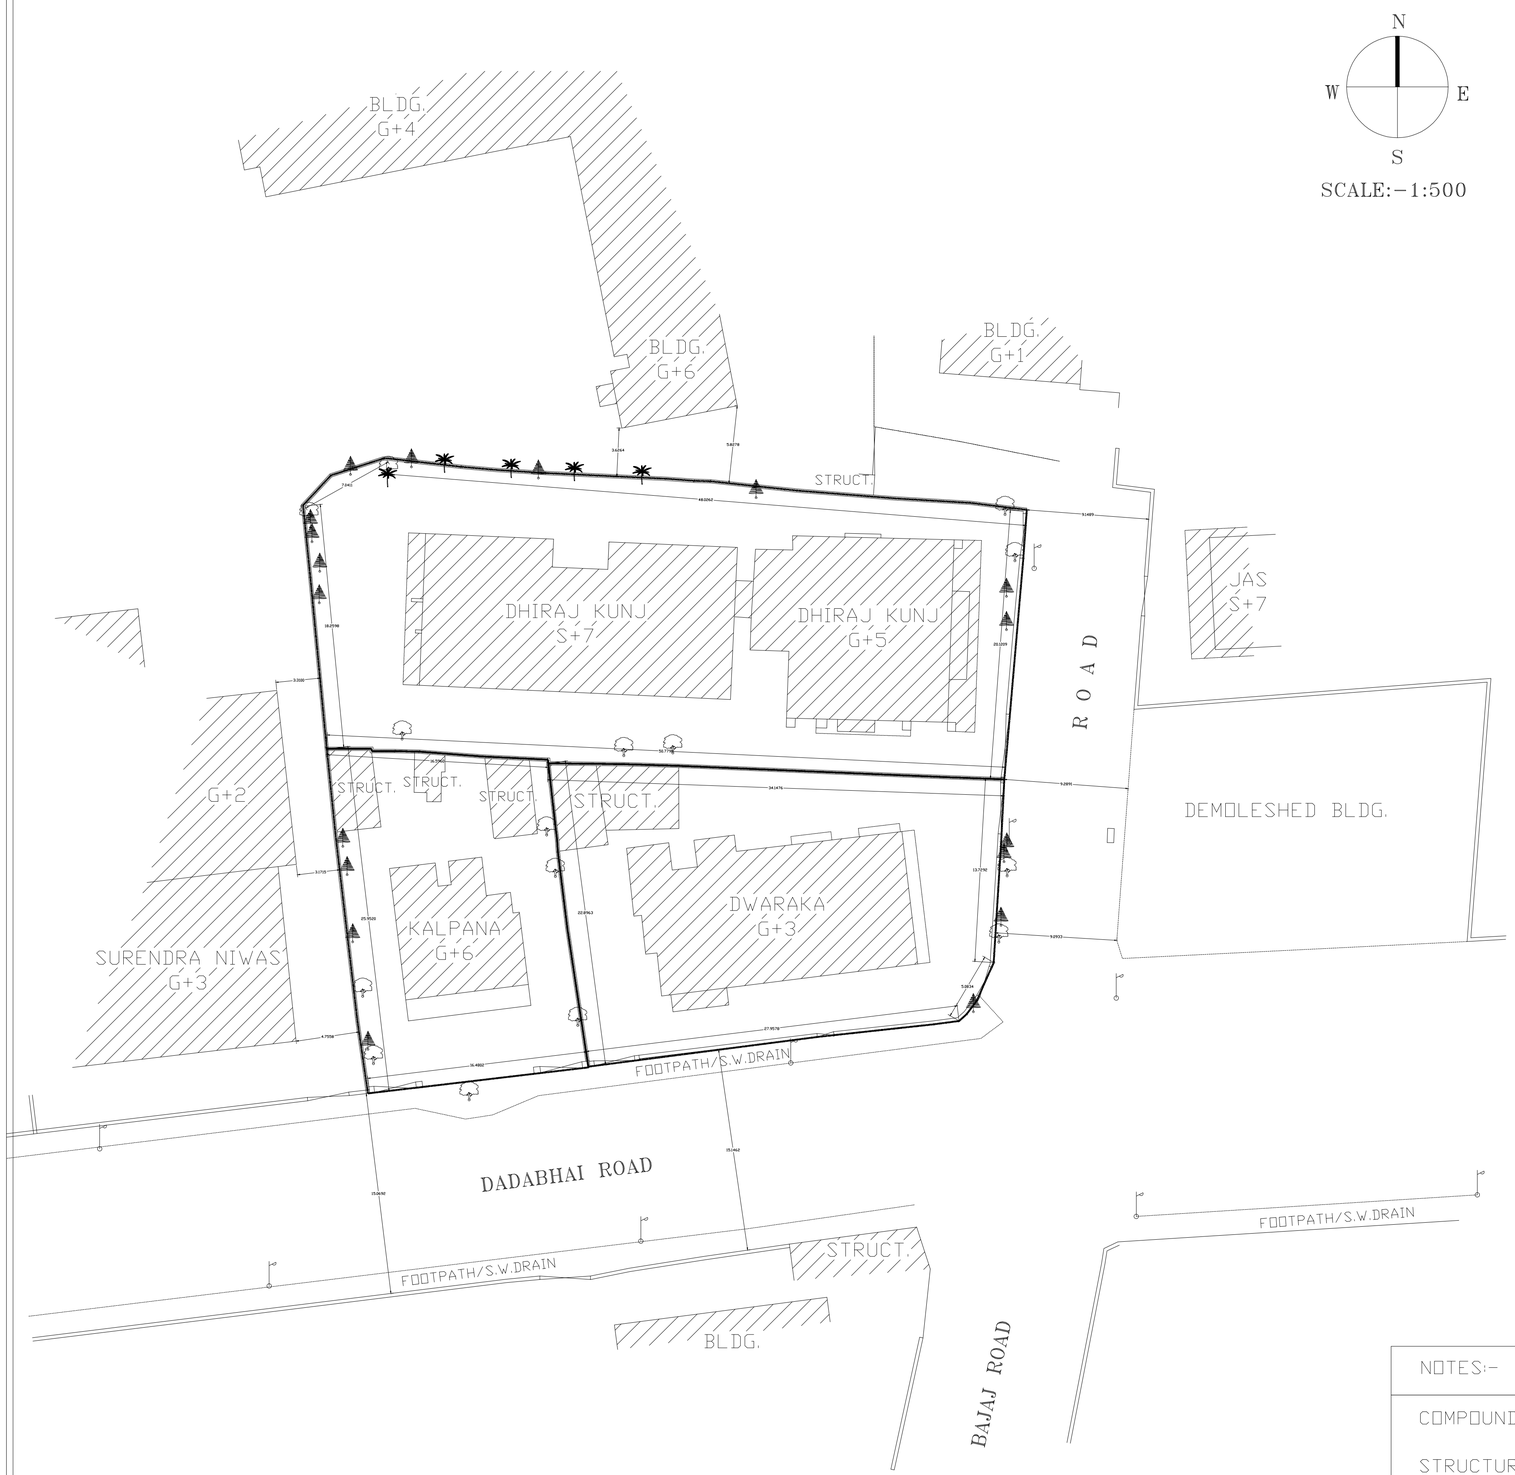

EXISTING BLOCK PLAN

SCALE:-1:500

SCALE:-1:500

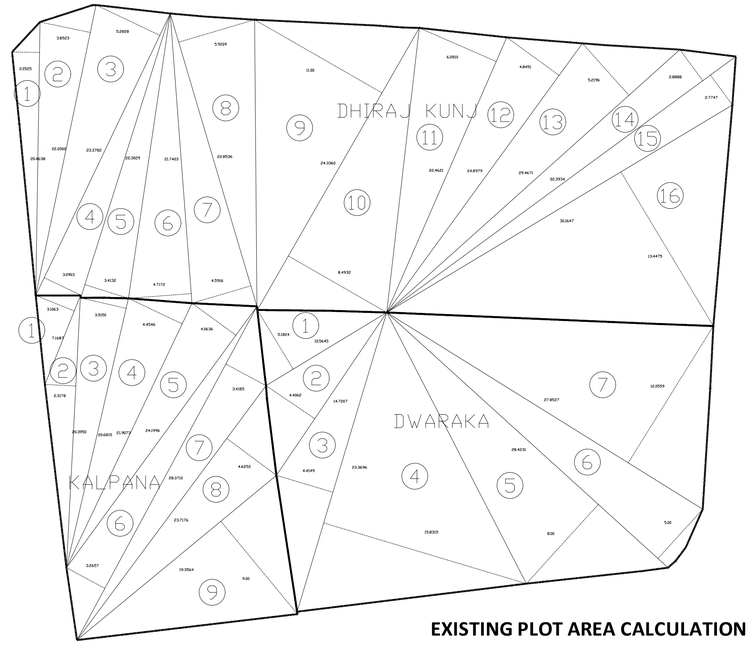

EXISTING PLOT AREA CALCULATION OF DHIRAJ KUNJ CHS LTD

No.	DIMENSION					SQ. MT.
1	20.46	x	2.05	x	0.50	20.97
2	22.20	x	3.85	x	0.50	42.74
3	23.38	x	5.28	x	0.50	61.72
4	23.38	x	3.09	x	0.50	36.12
5	22.30	x	3.41	x	0.50	38.02
6	21.74	x	4.72	x	0.50	51.31
7	22.85	x	4.59	x	0.50	52.44
8	22.85	x	5.92	x	0.50	67.64
9	24.34	x	11.00	x	0.50	133.87
10	24.34	x	8.49	x	0.50	103.32
11	22.46	x	6.28	x	0.50	70.52
12	24.90	x	4.85	x	0.50	60.38
13	29.47	x	5.22	x	0.50	76.92
14	32.39	x	2.89	x	0.50	46.80
15	32.39	x	2.77	x	0.50	44.86
16	30.16	x	13.45	x	0.50	202.83
					TOTAL	**1110.46**

EXISTING PLOT AREA CALCULATION OF KALPANA CHS LTD.

No.	DIMENSION					SQ. MT.
1	7.17	x	3.11	x	0.50	11.15
2	20.40	x	2.32	x	0.50	23.66
3	20.68	x	3.51	x	0.50	36.29
4	21.91	x	4.45	x	0.50	48.75
5	24.20	x	4.06	x	0.50	49.13
6	28.37	x	3.27	x	0.50	46.38
7	28.37	x	3.42	x	0.50	48.51
8	23.72	x	4.63	x	0.50	54.91
9	19.36	x	9.00	x	0.50	87.12
					TOTAL	**405.91**

EXISTING PLOT AREA CALCULATION OF DWARAKA CHS LTD

No.	DIMENSION					SQ. MT.
1	10.56	x	5.18	x	0.50	27.35
2	14.72	x	4.41	x	0.50	32.46
3	23.37	x	4.41	x	0.50	51.53
4	23.37	x	15.95	x	0.50	186.38
5	28.42	x	8.00	x	0.50	113.68
6	28.42	x	5.00	x	0.50	71.05
7	27.85	x	12.06	x	0.50	167.94
					TOTAL	**650.38**

NOTES:-

COMPOUND WALL

STRUCTURE/BLDG.

LIGHT POLE

MANHOLE

FOOTPATH/S.W.DRAIN

TREES

TITLE : TOTAL STATION SURVEY & PLOT AREA CALCULATION OF DHIRAJ KUNJ, DWARAKA & KALPANA CHSL, BAJAJ ROAD, NEAR EAST WEST FLYOVER, VILE PARLE (W), MUMBAI-56.

DATE : 22.10.2022

SCALE : 1:500

DRN : RAJU KERKAR

CHK : -

SURVEYED BY:-
RAJ ENTERPRISES
305/4-A, SAIDHAM CHS LTD.
MHADA COLONY, POONAM NAGAR,
NEAR P.M.G.P., ANDHERI (E),
MUMBAI-400 093.
M.:-9820334644.